
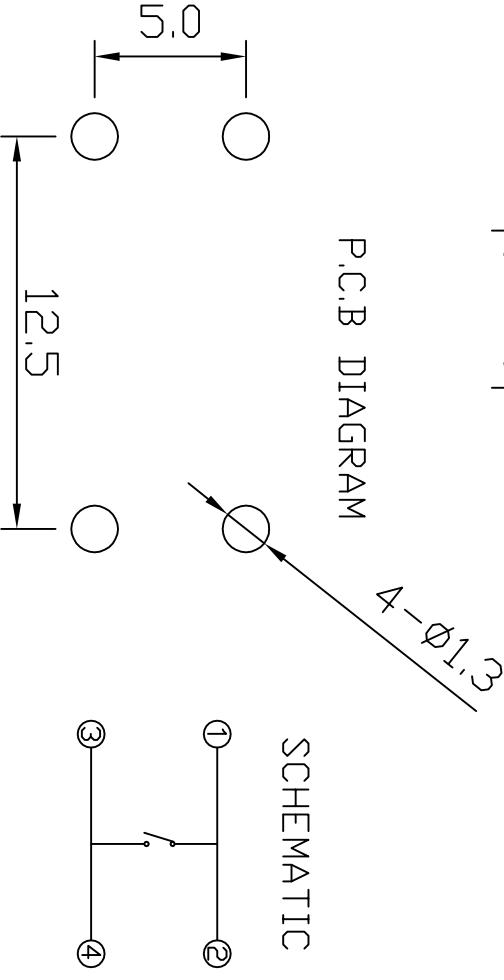
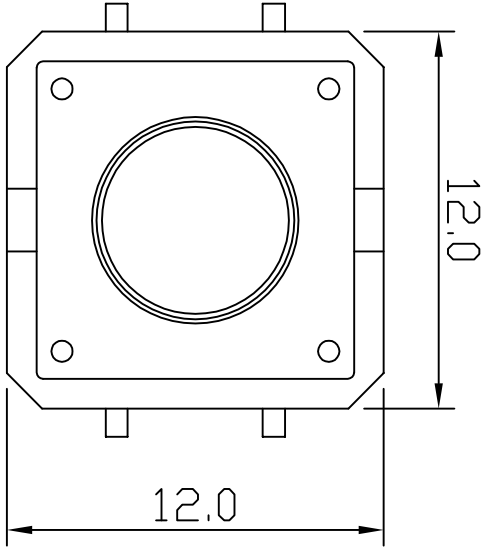
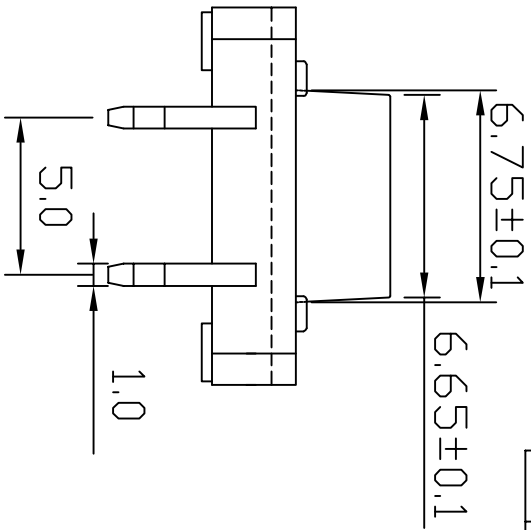


REV	DESCRIPTION	APPD	DATE
-----	-------------	------	------

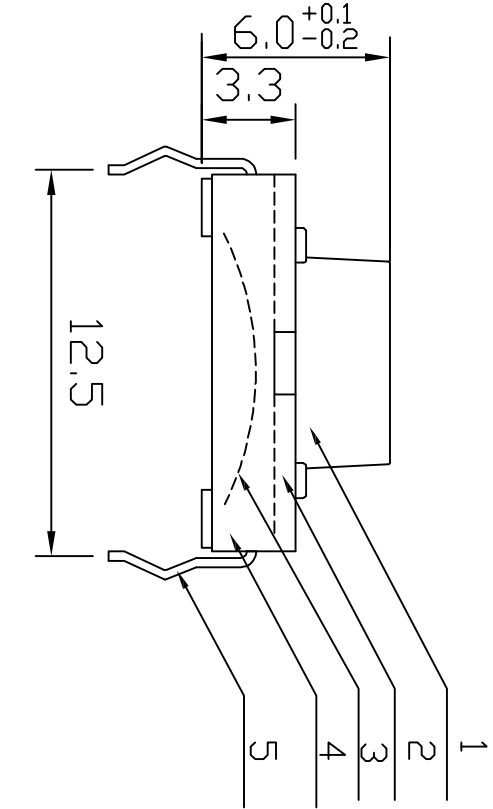

- 1. 额定功率/Rating:DC 12V 50mA;
- 2. 接触阻抗/Contact Resistance:30mΩMax;
- 3. 绝缘/Insulation Resistance:100MΩMax;
- 4. 耐压/Withstanding Voltage:AC250V For 1 Minute;
- 5. 寿命/Life50,000 cycles Min;
- 6. 动作力/Operating Force:250±50gf;
- 7. 行程/Travel:0.35±0.1mm;
- 8. 使用温度/Operating Temperature:-20°C~+70°C.

NO.	DESCRIPTION	QTY	MATERIAL	FINISH
1	STEM	1	PA6T	WHITE
2	COVER	1	SPCC	PLATING NI
3	CONTACT	1	C5210	PLATING Ag
4	BOTTOM	1	PA6T	BLACK
5	TERMINAL	4	C2680	PLATING Sn
UNIT:MM				
SIZE: A4		SHEET: 1 OF 1		
SCALE: 		VER: 1		
PART NO:01D120117101		TITLE: TACT SWITCH		
GENERAL TOLERANCE: X.=±0.5, .X=±0.35 .XX=±0.15, .XXX=±0.05 X*=±2° .XX*=±1°		MODEL NO: TS12A-H60M-W-L		
DESIGNER BY: DONLY		岡崎電子有限公司 GONGKIN ELECTRONIC CO.,LTD		
APPROVED BY: JACK				
DATE:				