


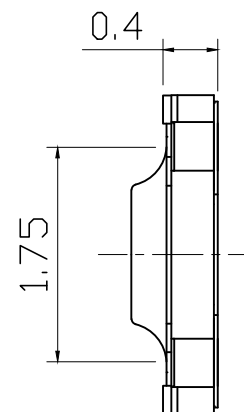




7		8	
REV	DESCRIPTION	APPD	DATE

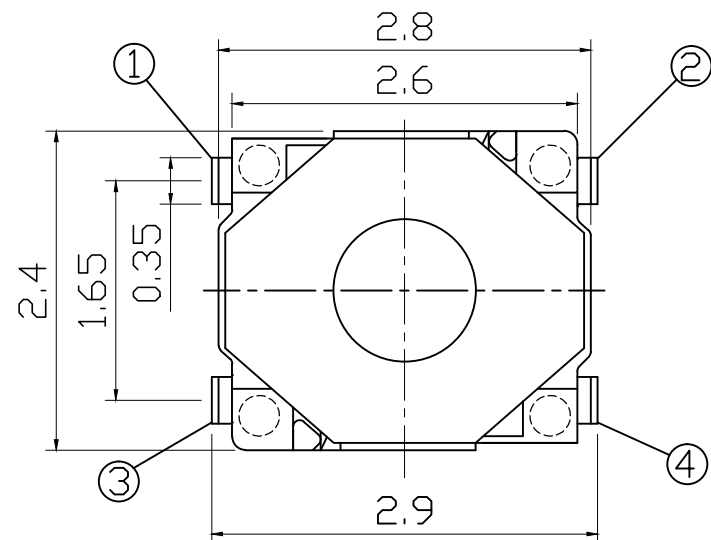


Circuit diagram

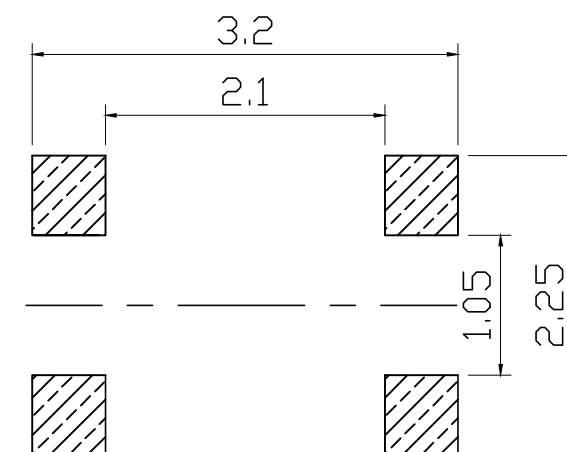

P.C.B layout

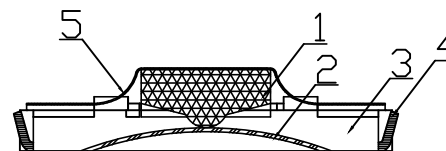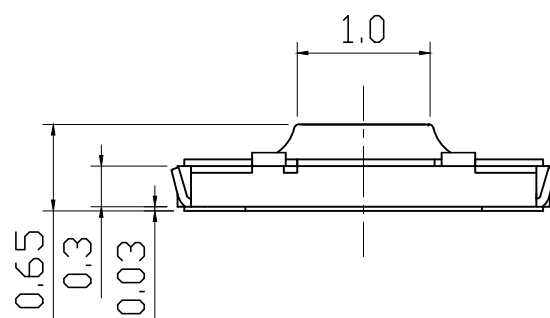

1. 额定功率/Rating:DC 12V 50mA;
2. 接触阻抗/Contact Resistance:100mΩ Max;
3. 绝缘/Insulation Resistance:100MΩ Max;
4. 耐电压/Withstanding Voltage:AC100V For 1 Minute
5. 寿命/Life:100,000 cycles Min;
6. 动作力/Operating Force:160±50gf;
7. 行程/Travel:0.1±0.05;
8. 使用温度/Temperature:-30℃~+80℃.

NO.	DESCRIPTION	QTY	MATERIAL	FINISH
1	STEM	1	PA	BLACK
2	CONTACT	1	SUS301	PLATING Ag
3	BOTTOM	1	PPA	BLACK
4	TERMINAL	4	C5191	PLATING Ag
5	FILM	1	PI	YELLOW
UNIT:MM 		SIZE: A4	SHEET: 1 OF 1	TITLE: TACT SWITCH
		SCALE: 	VER: 1	
PART NO:		DWG NO:		MODEL NO: TS22A-U0.65-V
GENERAL TOLERANCE: X.=±0.25, .X=±0.2 .XX=±0.1, .XXX=±0.05 .X*=±2° .XX*=±1°		DESIGNER BY:	DONY	 岡琦電子有限公司 GONGKIN ELECTRONIC CO.,LTD
		APPROVED BY:	JACK	
		DATE:		

UNIT:MM		SIZE: A4		SHEET: 1 OF 1		TITLE: TACT SWITCH	
		SCALE: /		VER: 1		MODEL NO: TS22A-U0.65-V	
PART NO:				DWG NO:			
GENERAL TOLERANCE: X=±0.25, .X=±0.2 .XX=±0.1, .XXX=±0.05 .X*=±2° .XX*=±1°		DESIGNER BY:		DONY		 岡琦電子有限公司 GONGKIN ELECTRONIC CO.,LTD	
		APPROVED BY:		JACK			
		DATE:					