
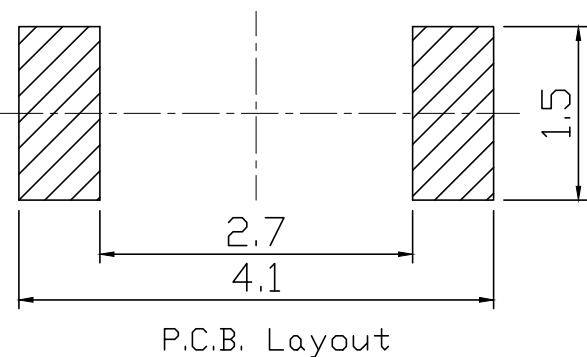
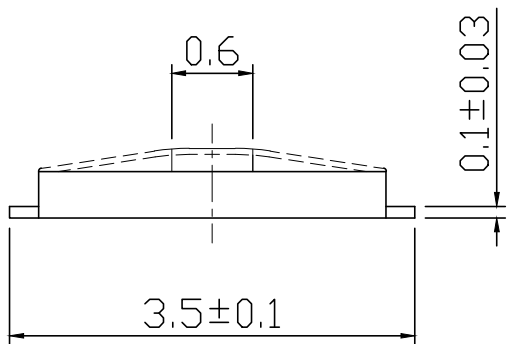
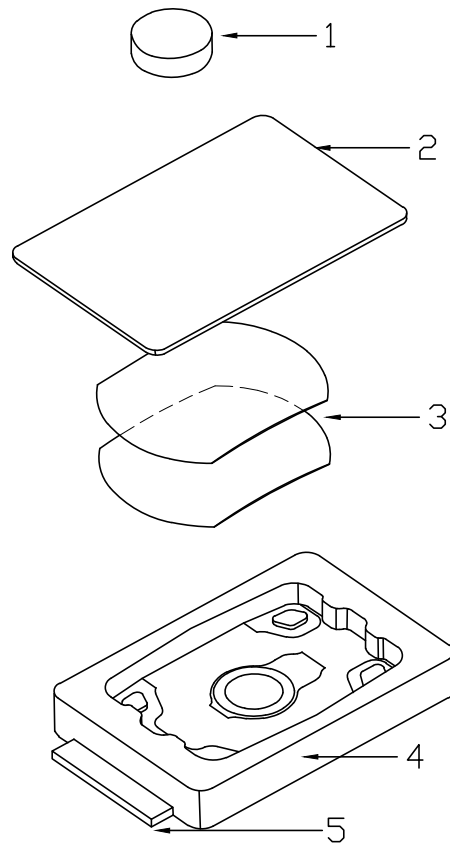

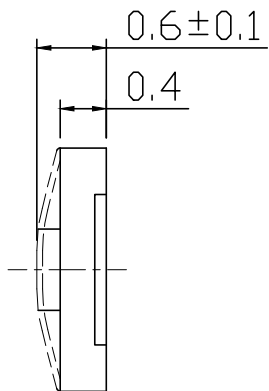


7	8
REV	DESCRIPTION
APPD	DATE

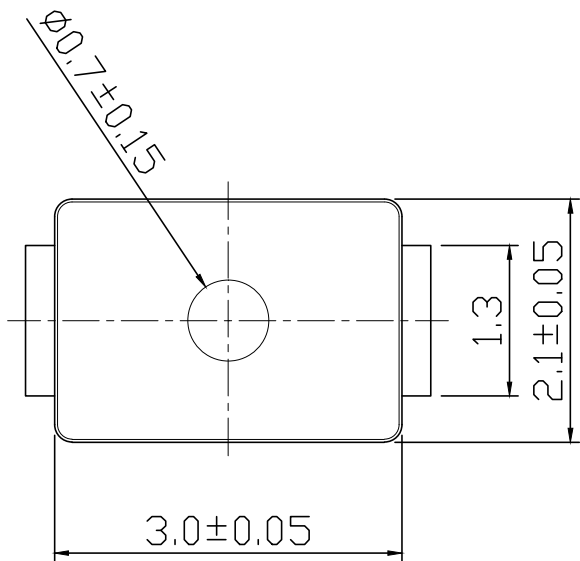

1. 额定功率/Rating:DC 12V 50mA;
2. 接触阻抗/Contact Resistance:100mΩ Max;
3. 绝缘/Insulation Resistance:50MΩ Max;
4. 耐电压/Withstanding Voltage:AC250V For 1 Minute;
5. 寿命/Life:100,000 cycles Min;
6. 动作力/Operating Force:200±40gf;
7. 行程/Travel:0.15±0.05mm;
8. 使用温度/Operating Temperature:-20℃~80℃.

NO.	DESCRIPTION	QTY	MATERIAL	FINISH
1	STEM	1	PA	BLACK
2	WATERPROOF FILM	1	PI	TRANSPARENT
3	CONTACT	2	SUS301	SILVER
4	BASE	1	PPA	BLACK
5	TERMINAL	2	C5191	SILVER
UNIT:MM		SIZE: A4	SHEET: 1 OF 1	TITLE: TACT SWITCH
		SCALE: 1/	VER: 1	MODEL NO: TS23A-F06-J
PART NO:		DWG NO:		
GENERAL TOLERANCE: X.=±0.25, .X=±0.2 .XX=±0.1, .XXX=±0.05 .X*=±2°, .XX*=±1°		DESIGNER BY: YONGX	GONGKIN ELECTRONIC CO.,LTD	
		APPROVED BY: JACK		
		DATE:		