

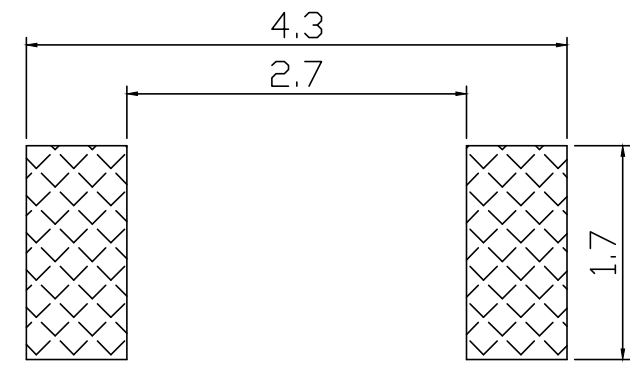
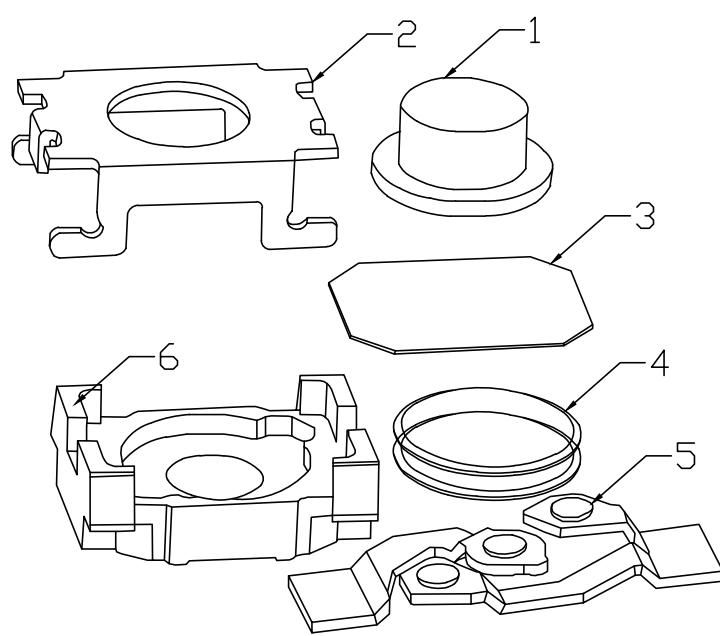
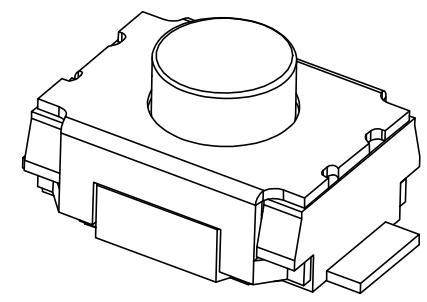
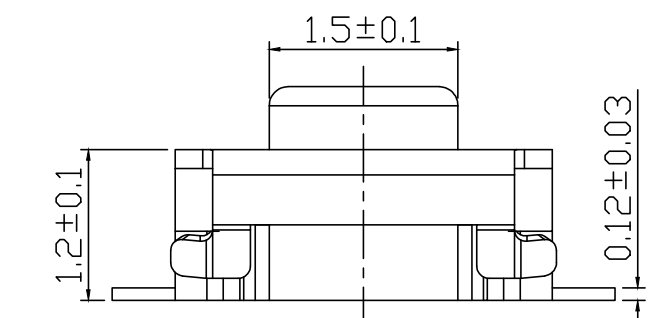
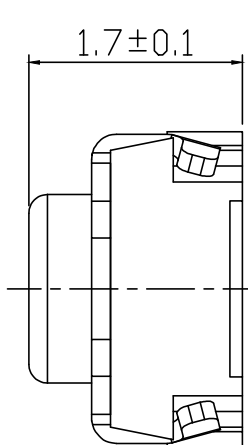


REV	DESCRIPTION	APPD	DATE

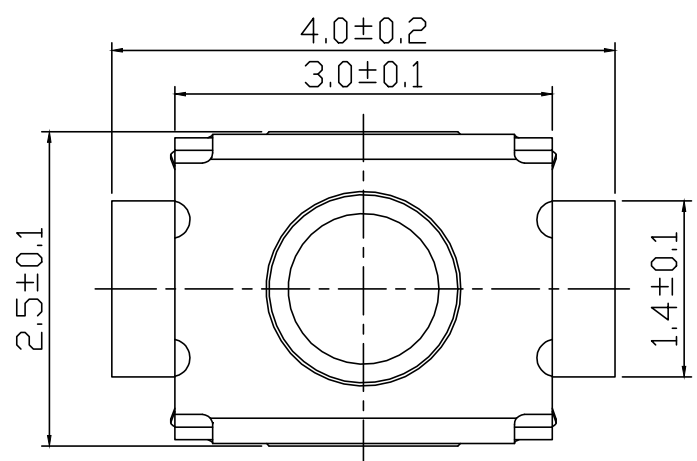

- 1.额定功率/Rating:DC 12V 50mA;
- 2.接触阻抗/Contact Resistance:100mΩ Max;
- 3.绝缘/Insulation Resistance:100MΩ Max;
- 4.耐电压/Withstanding Voltage:AC250V For 1 Minute;
- 5.寿命/Life:100,000 cycles Min;
- 6.动作力/Operating Force:160±30gf;
- 7.行程/Travel:0.13±0.07mm;
- 8.使用温度/Operating Temperature:-20℃~70℃.

NO.	DESCRIPTION	QTY	MATERIAL	FINISH
1	STEM	1	LCP	BLACK
2	COVER	1	SUS304	CLEANDUT
3	SEAL PLATE	1	PI	YELLOW
4	CONTACT	2	SUS301	Ag PLATED
5	TERMINAL	2	PHOSPHOR COPPER	Ag PLATED
6	BOTTOM	1	LCP	WHITE

UNIT:MM	SIZE: A4	SHEET: 1 OF 1	TITLE: TACT SWITCH
	SCALE: /	VER: 1	MODEL NO: TS23C1-F17-V
PART NO:	DESIGNER BY: YONGX		
GENERAL TOLERANCE: X.=±0.2, .X=±0.1 .XX=±0.05, .X*=±2° .XX*=±1°	APPROVED BY: JACK		
	DATE:		

岡琦電子有限公司
GONGKIN ELECTRONIC CO.,LTD

P.C.B Layout