

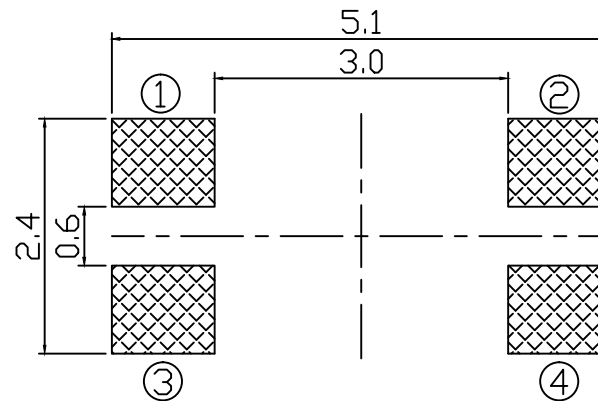
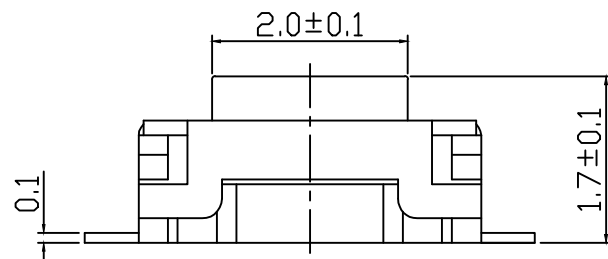



REV	DESCRIPTION	APPD	DATE

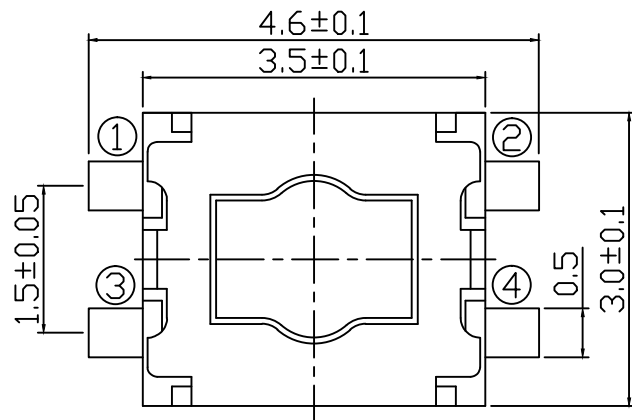


PCB Layout



Circuit Diagram

- 1.额定功率/Rating:DC 12V 50mA;
- 2.接触阻抗/Contact Resistance:100mΩ Max;
- 3.绝缘/Insulation Resistance:100MΩ Max;
- 4.耐电压/Withstanding Voltage:AC250V For 1 Minute;
- 5.寿命/Life:50,000 cycles Min;
- 6.动作力/Operating Force:160±50gf;
- 7.行程/Travel:0.13±0.07mm;
- 8.使用温度/Operating Temperature:-20℃~70℃.

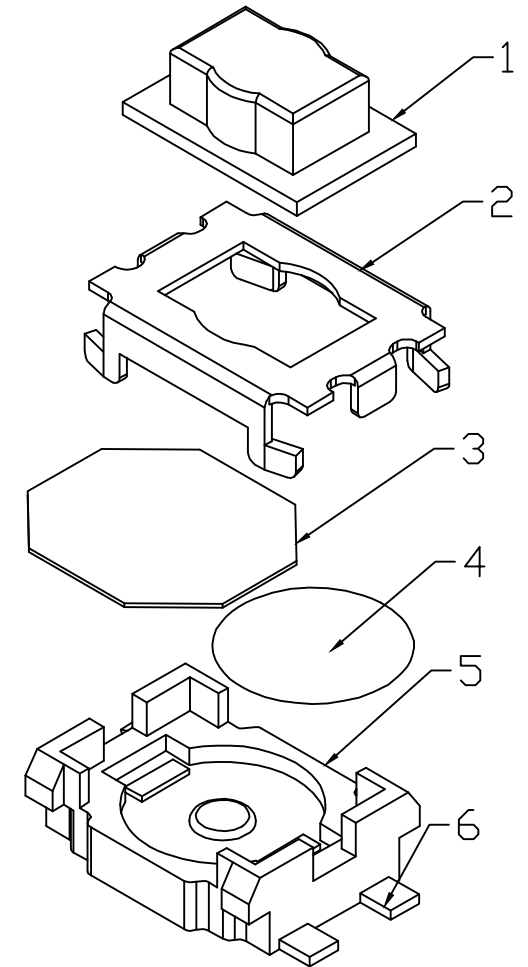

NO.	DESCRIPTION	QTY	MATERIAL	FINISH
1	STEM	1	PA	BLACK
2	COVER	1	SUS	SILVER
3	FILM	1	PI	GRAY
4	CONTACT	1	Ag-SUS	SILVER
5	BOTTOM	1	LCP	BLACK
6	TERMINAL	4	C5191	SILVER

UNIT:MM 	SIZE: A4	SHEET: 1 OF 1	TITLE: TACT SWITCH	
	SCALE: /	VER: 1	MODEL NO: TS33C2-F17-V	
PART NO:		DESIGNER BY: YONGX	岡琦電子有限公司 GONGKIN ELECTRONIC CO.,LTD	
GENERAL TOLERANCE: X.=±0.2, .X=±0.1 .XX=±0.05, .X*=±2°, .XX*=±1°		APPROVED BY: JACK		
		DATE:		