
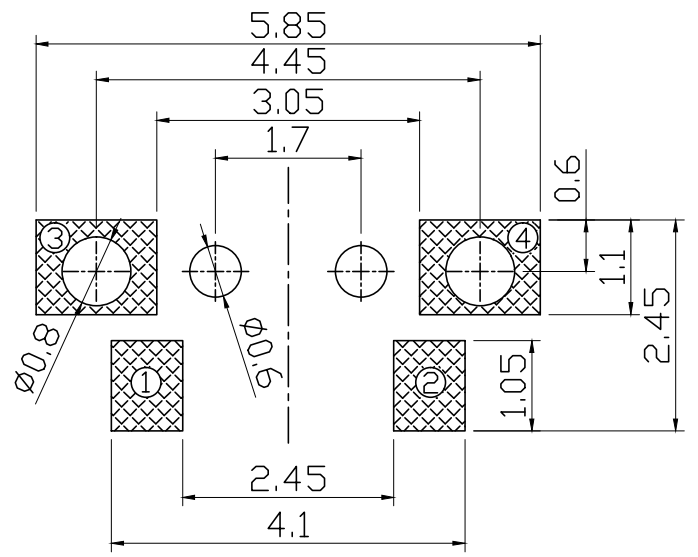
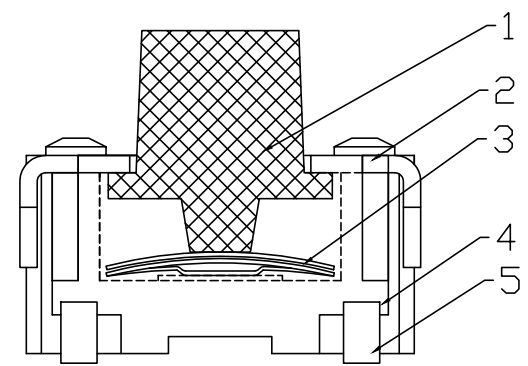

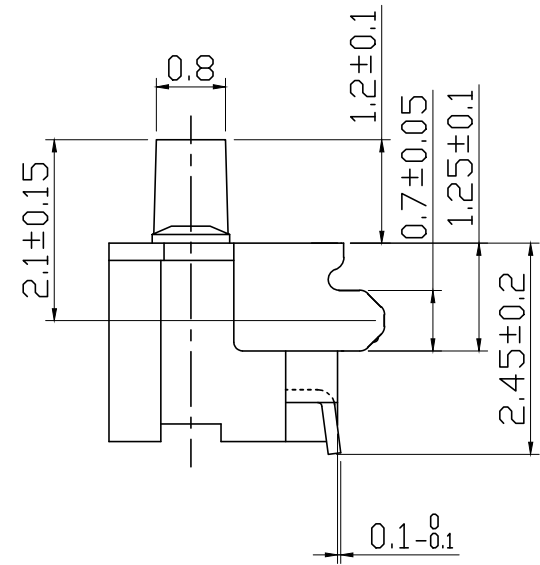


REV	DESCRIPTION	APPD	DATE

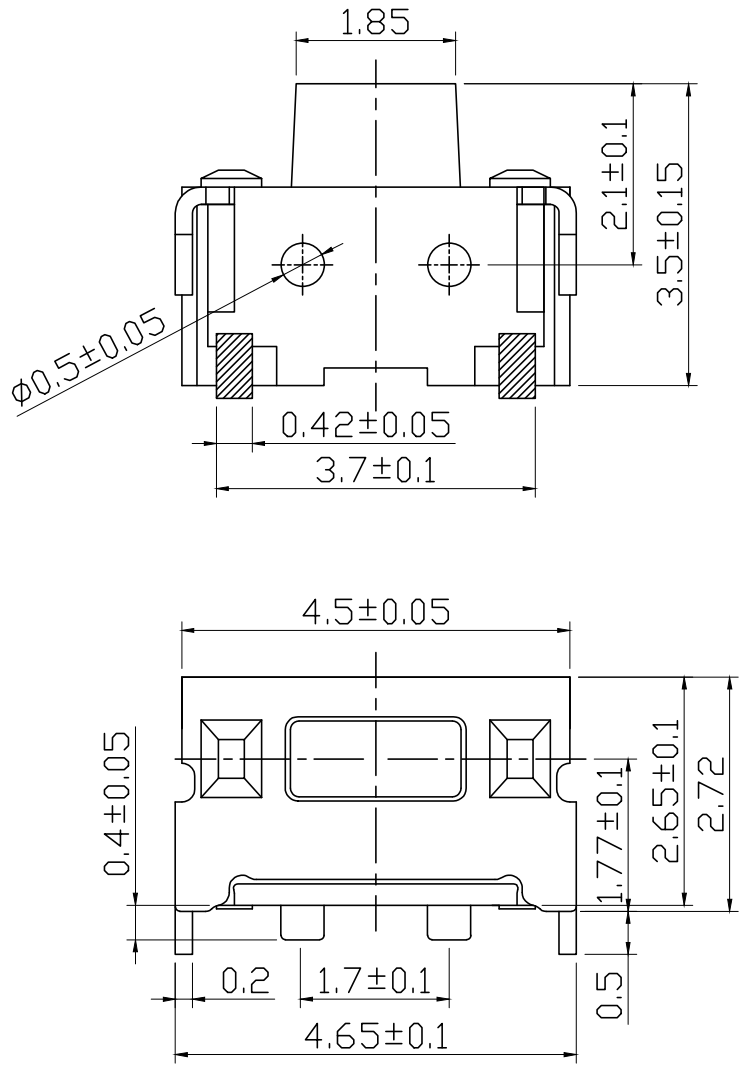

Reference P.C.B. Layout

- 1. 额定功率/Rating:DC 12V 50mA;
- 2. 接触阻抗/Contact Resistance:200m Ω Max;
- 3. 绝缘/Insulation Resistance:100M Ω Max;
- 4. 耐电压/Withstanding Voltage:
AC250V For 1 Minute;
- 5. 寿命/Life:30,000 cycles Min;
- 6. 动作力/Operating Force:250±50gf;
- 7. 行程/Travel:0.15±0.1mm;
- 8. 使用温度/Operating Temperature:-20℃~70℃.

NO.	DESCRIPTION	QTY	MATERIAL	FINISH
1	STEM	1	LCP	BLACK
2	COVER	1	COPPER ALLOY	PLATING Ag
3	CONTACT	2	SUS	PLATING Ag
4	BOTTOM	1	LCP	BLACK
5	TERMINAL	2	COPPER ALLOY	PLATING Ag
UNIT:MM		SIZE: A4	SHEET: 1 OF 1	TITLE: TACT SWITCH
		SCALE: /	VER: 1	MODEL NO: TS24B-DVE-M
PART NO:		DWG NO:		 岡琦電子有限公司 GONGKIN ELECTRONIC CO.,LTD
GENERAL TOLERANCE: X.=±0.2, .X=±0.1 .XX=±0.05, .XXX=±0.03		DESIGNER BY:	YONGX	
.X*=±2° .XX*=±1°		APPROVED BY:	JACK	
		DATE:		