


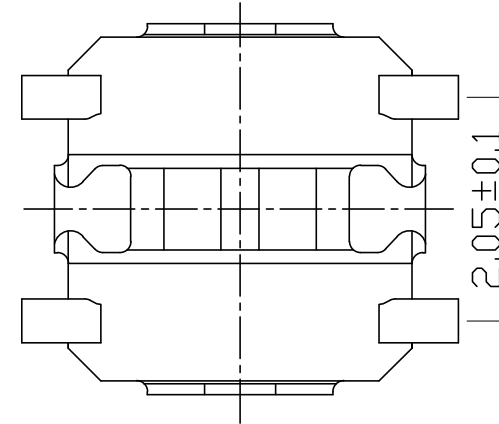
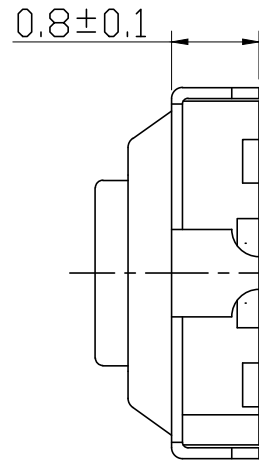
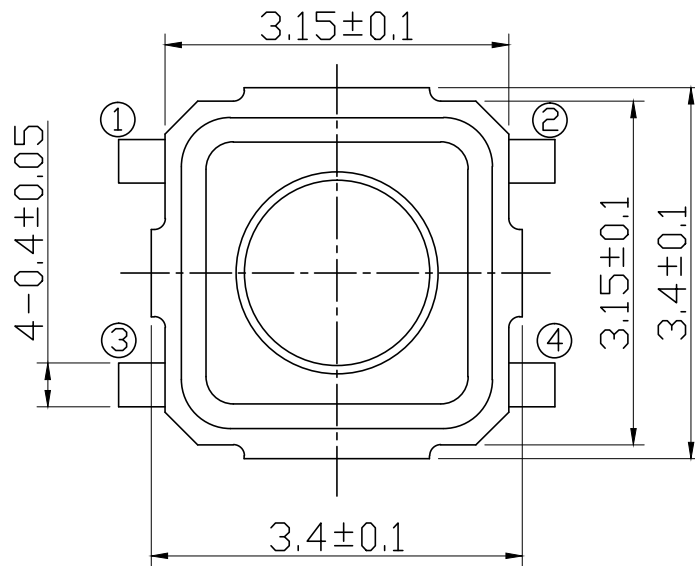
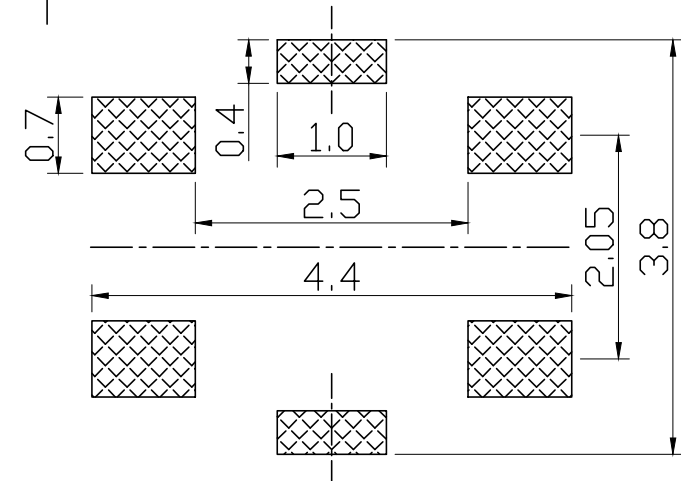


REV	DESCRIPTION	APPD	DATE

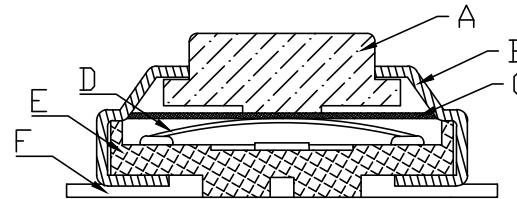

Circuit Diagram

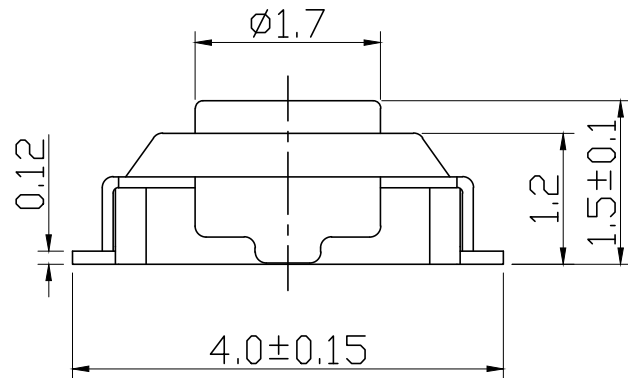

P.C.B Layout

1. 额定功率/Rating:DC 12V 50mA;
2. 接触阻抗/Contact Resistance:200mΩ Max;
3. 绝缘/Insulation Resistance:100MΩ Max;
4. 耐电压/Withstanding Voltage:AC250V For 1 Minute;
5. 寿命/Life:30,000 cycles Min;
6. 动作力/Operating Force:250±50gf;
7. 行程/Travel:0.2±0.1mm;
8. 使用温度/Operating Temperature:-25℃~85℃.

NO.	DESCRIPTION	QTY	MATERIAL	FINISH
A	STEM	1	LCP	BLACK
B	COVER	1	SUS T0.1	PLATING Ag
C	DUSTPROOF FILM	1	POLYIMIDE TAP T0.05	BROWN
D	CONTACT	2	SUS	PLATING Ag
E	BASE	1	LCP	BLACK
F	TERMINAL	4	H62 T0.12	PLATING Ag

UNIT:MM		SIZE: A4	SHEET: 1 OF 1	TITLE:	TACT SWITCH
		SCALE: 1/	VER: 1	MODEL NO:	TS33A2-S15-M
PART NO: 01S3301WXC02					
GENERAL TOLERANCE:		DESIGNER BY:	DONY	 岡琦電子有限公司 GONGKING ELECTRONIC CO.,LTD	
X.=±0.2, .X.=±0.1		APPROVED BY:	JACK		
.XX=±0.05, .XXX=±0.03		DATE:			
.X*=±2° .XX*=±1°					