


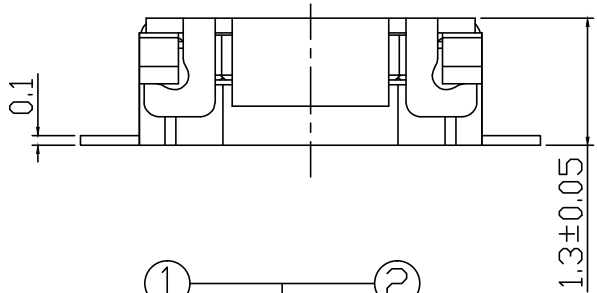
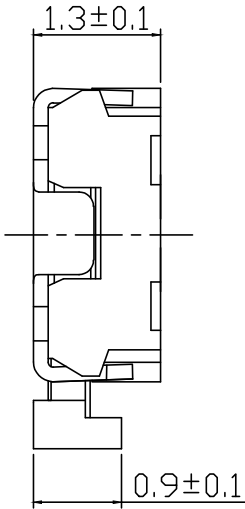



7	8
REV	DESCRIPTION
APPD	DATE

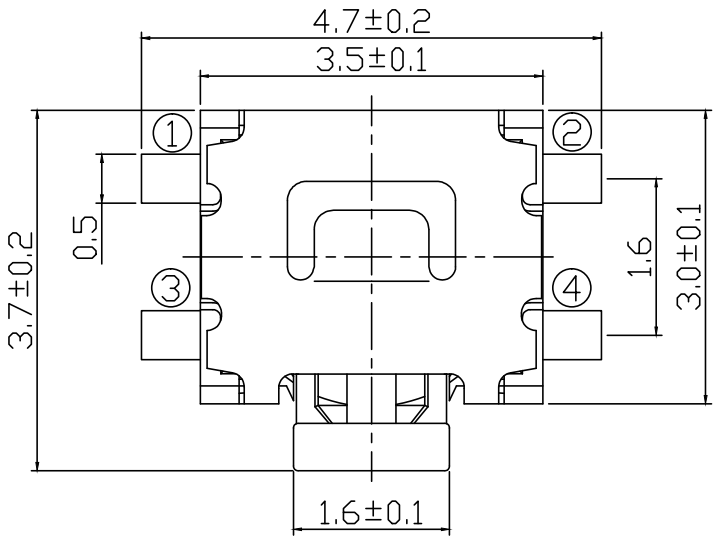

Circuit Diagram

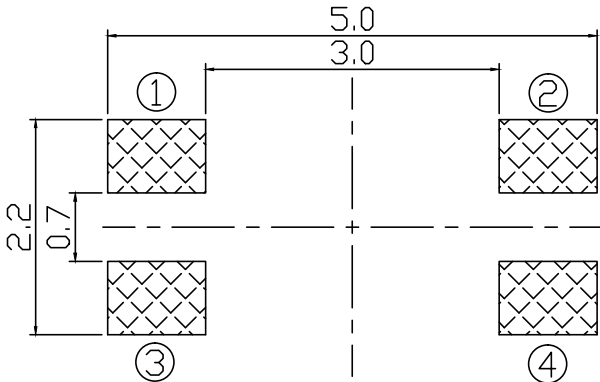

P.C.B Layout

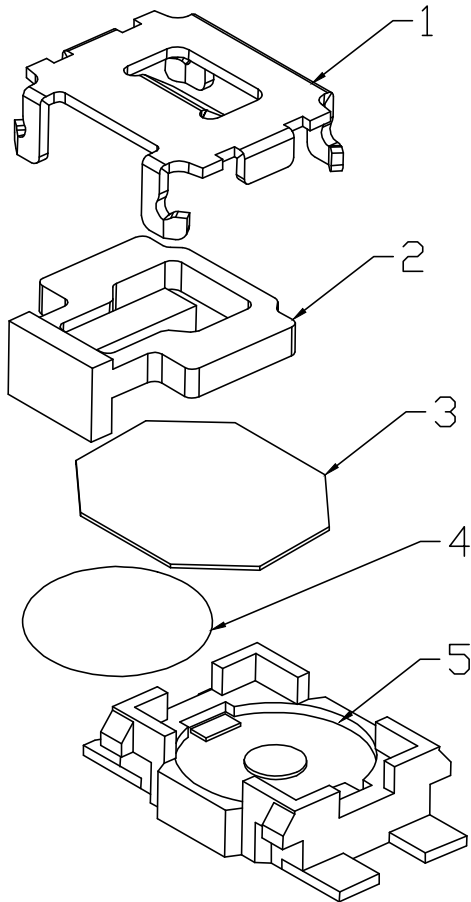

- 1.额定功率/Rating:DC 12V 50mA;
2.接触阻抗/Contact Resistance:100mΩ Max;
3.绝缘/Insulation Resistance:100MΩ Max;
4.耐电压/Withstanding Voltage:AC250V For 1 Minute;
5.寿命/Life:50,000 cycles Min;
6.动作力/Operating Force:180±50gf;
7.行程/Travel:0.2±0.1mm;
8.使用温度/Operating Temperature:-20℃~70℃.

NO.	DESCRIPTION	QTY	MATERIAL	FINISH
1	COVER	1	SUS	SILVER
2	STEM	1	PA	BLACK
3	FILM	1	PI	GRAY
4	CONTACT	1	Ag-SUS	SILVER
5	BOTTOM	1	LCP	BLACK
6	TERMINAL	4	PHOSPHOR COPPER	SILVER
UNIT:MM		SIZE: A4	SHEET: 1 OF 1	TITLE: TACT SWITCH
		SCALE: /	VER: 1	MODEL NO: TS33C-FV-J
PART NO:		DESIGNER BY: YONGX	岡琦電子有限公司 GONGKIN ELECTRONIC CO.,LTD	
GENERAL TOLERANCE: X.=±0.2, .X=±0.1 .XX=±0.05, X*=±2°, .XX*=±1°		APPROVED BY: JACK		
		DATE:		