
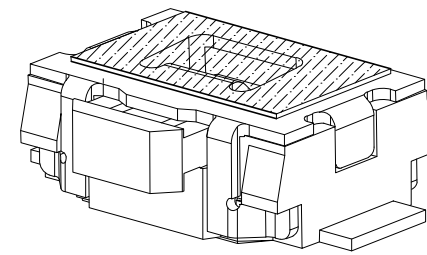
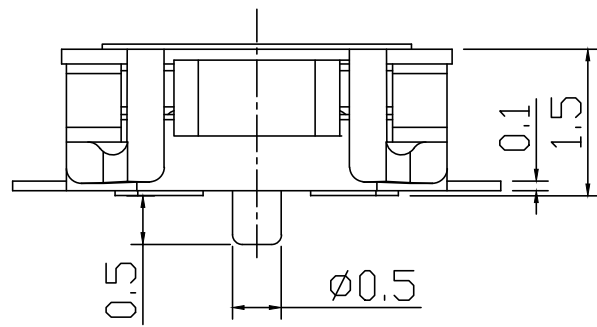
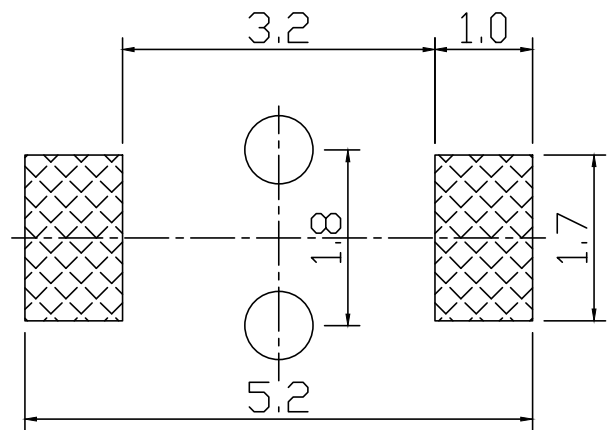

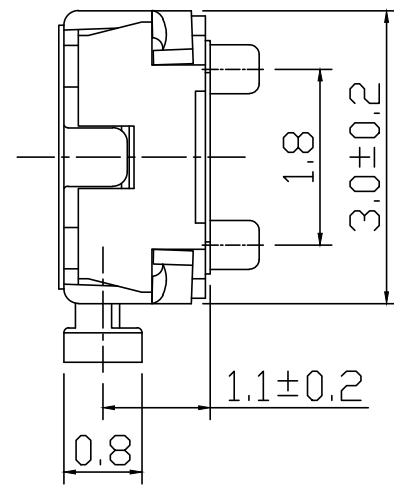


7	8
REV	DESCRIPTION

APPD	DATE

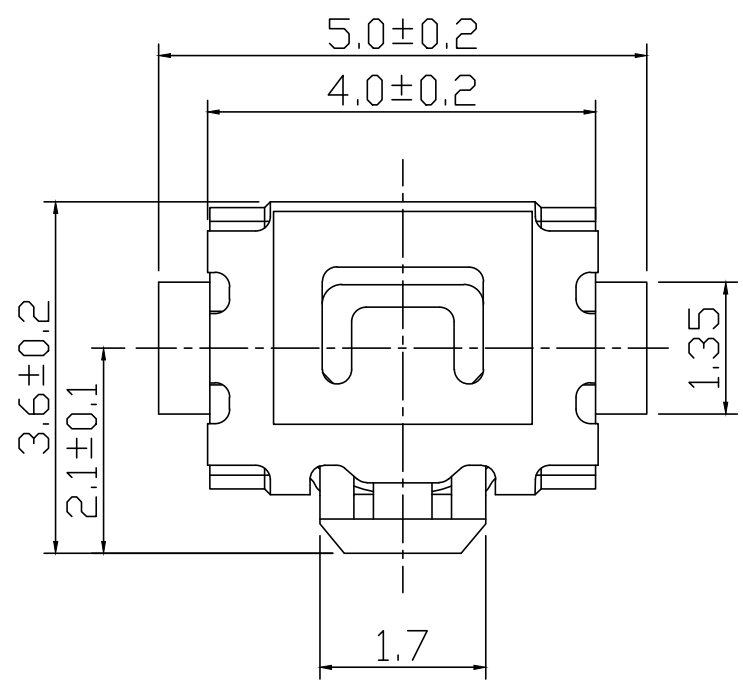

P.C.B Layout

- 1.额定功率/Rating:DC 12V 50mA;
2.接触阻抗/Contact Resistance:100mΩ, Max;
3.绝缘/Insulation Resistance:100MΩ, Max;
4.耐电压/Withstanding Voltage:AC250V For 1 Minute;
5.寿命/Life:50,000 cycles Min;
6.动作力/Operating Force:240±50gf;
7.行程/Travel:0.2±0.1mm;
8.使用温度/Operating Temperature:-20℃~70℃.

NO.	DESCRIPTION	QTY	MATERIAL	FINISH
1	STEM	1	LCP	BLACK
2	COVER	1	C5191	SILVER
3	FILM	1	PI	BROWN
4	TERMINAL	1	C5191	SILVER
5	CONTACT	2	SUS	SILVER
6	BOTTOM	1	LCP	WHITE
UNIT:MM		SIZE: A4	SHEET: 1 OF 1	TITLE: TACT SWITCH
		SCALE: 1/1	VER: 1	MODEL NO: TS34C-FVE-M
PART NO: 01S340316403				岡琦電子有限公司 GONGKIN ELECTRONIC CO.,LTD
GENERAL TOLERANCE: X.=±0.2, .X=±0.1 .XX=±0.05, X*=±2° .XX*=±1°		DESIGNER BY: YONGX	APPROVED BY: JACK	
		DATE:		