


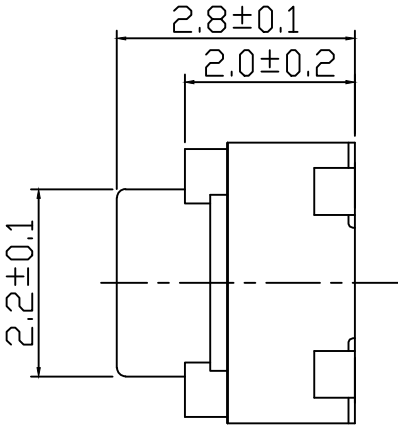
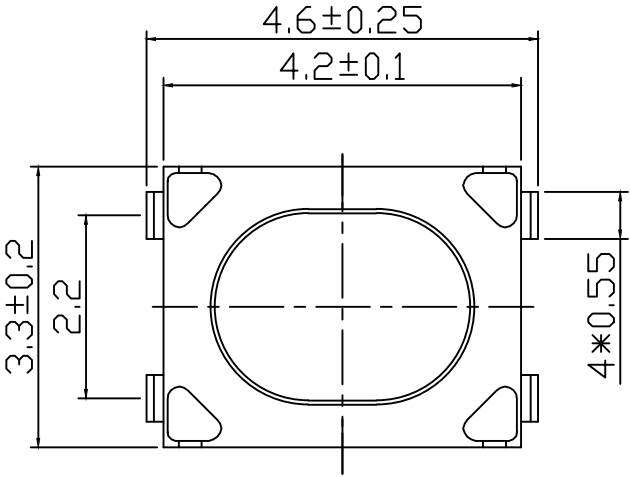


REV	DESCRIPTION	APPD	DATE

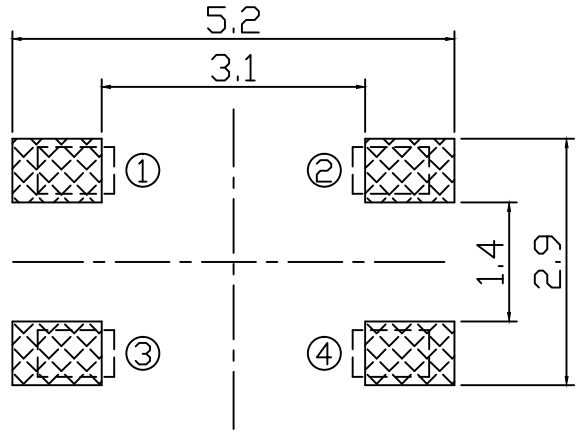

Circuit Diagram

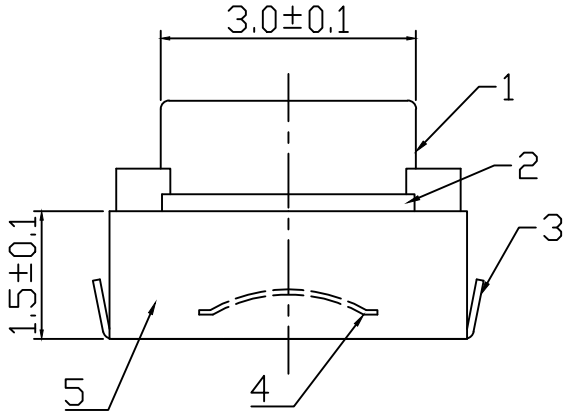

P.C.B Layout

- 1.额定功率/Rating:DC 12V 50mA;
2.接触阻抗/Contact Resistance:200mΩ Max;
3.绝缘/Insulation Resistance:100MΩ Max;
4.耐电压/Withstanding Voltage:AC250V For 1 Minute;
5.寿命/Life:50,000 cycles Min;
6.动作力/Operating Force:250±50gf;
7.行程/Travel:0.2±0.1mm;
8.使用温度/Operating Temperature:-20℃~70℃.

NO.	DESCRIPTION	QTY	MATERIAL	FINISH
1	STEM	1	PA	WHITE
2	COVER	1	BRASS	SILVER
3	TERMINAL	4	BRASS	SILVER
4	CONTACT	1	SUS	SILVER
5	BOTTOM	1	PA46	WHITE
UNIT:MM		SIZE: A4	SHEET: 1 OF 1	TITLE: TACT SWITCH
		SCALE: /	VER: 1	MODEL NO: TS34E-U28-M
PART NO:		DESIGNER BY: YONGX	GONGKIN ELECTRONIC CO.,LTD	
GENERAL TOLERANCE:		APPROVED BY: JACK		
X.=±0.2, .X=±0.1 .XX=±0.05, .X*=±2° .XX*=±1°		DATE:		