
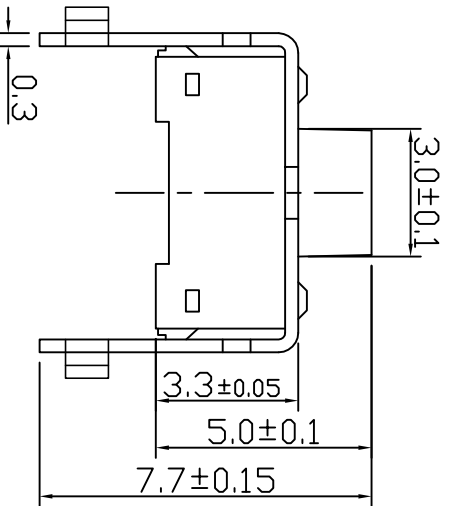
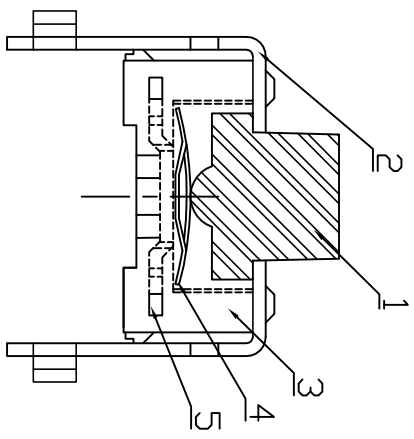
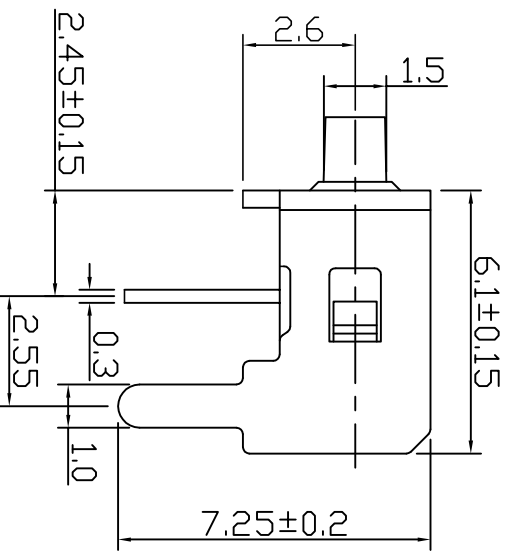
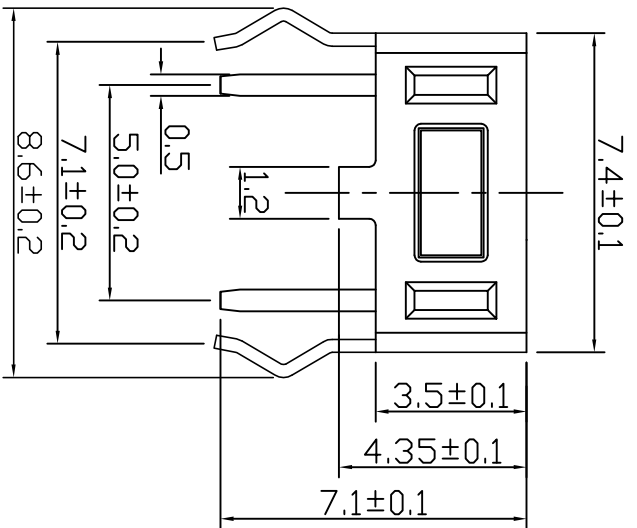
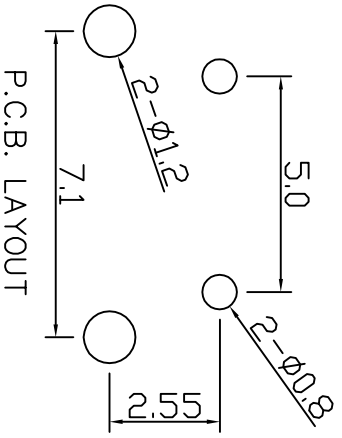


REV	DESCRIPTION	APPD	DATE

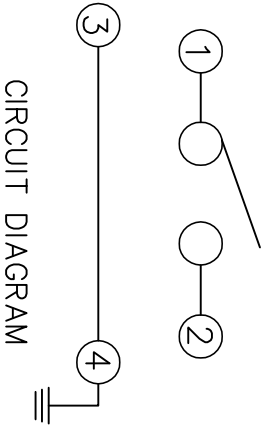

- 1.额定功率/Rating:DC 12V 50mA;
- 2.接触阻抗/Contact Resistance:200mΩMax;
- 3.绝缘电阻/Insulation Resistance:100MΩMax;
- 4.耐电压/Withstanding Voltage:AC250V For 1 Minute;
- 5.寿命/Life:25,000 cycles Min;
- 6.动作力/Operating Force:250±50gf;
- 7.行程/Travel:0.25±0.1mm;
- 8.使用温度/Operating Temperature:-20℃~70℃.

ND.	DESCRIPTION	QTY	MATERIAL	FINISH
1	STEM	1	PPA	WHITE or BLACK
2	COVER	1	STEEL	SILVER
3	BOTTOM	1	PPA	BLACK
4	CONTACT	1	SUS	SILVER
5	TERMINAL	2	C2680	SILVER
UNIT:MM		TITLE: TACT SWITCH		
SCALE: 1/1		MODEL NO: TS36A-X5.0-GM		
GENERAL TOLERANCE: X=±0.25, XX=±0.1, XXX=±0.05		PART NO: YONGX		
DESIGNER BY: JACK		DATE:		
APPROVED BY:				
X*=±2°, XX*=±1°				

岡崎電子有限公司
GONGKIN ELECTRONIC CO.,LTD