
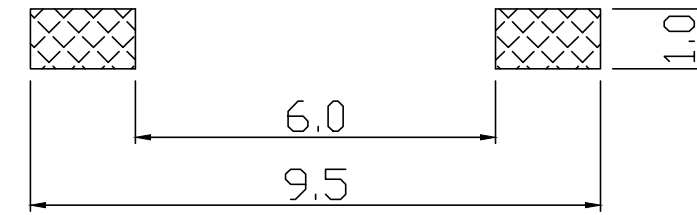
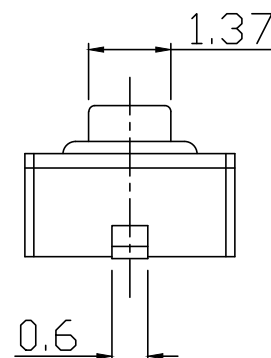
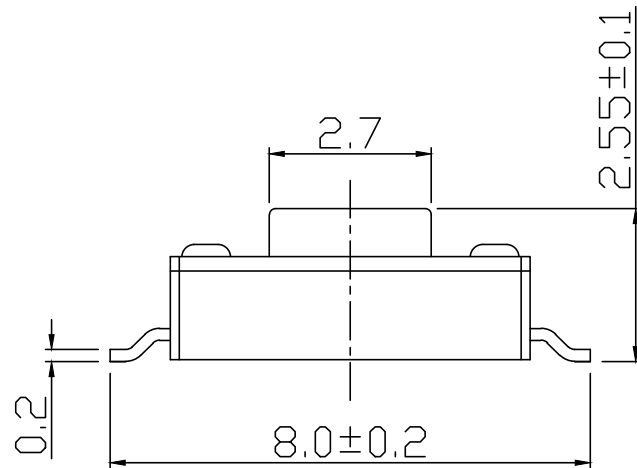
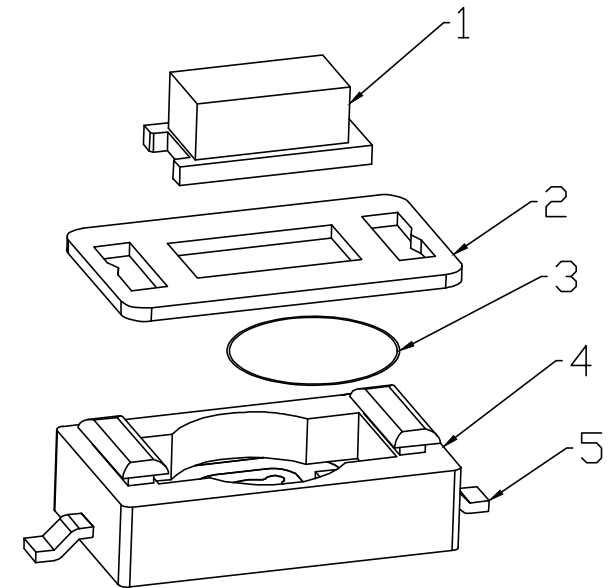
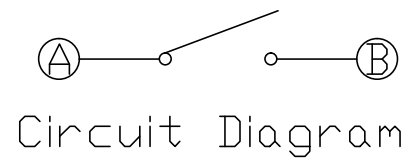


7	8
REV	DESCRIPTION
APPD	DATE

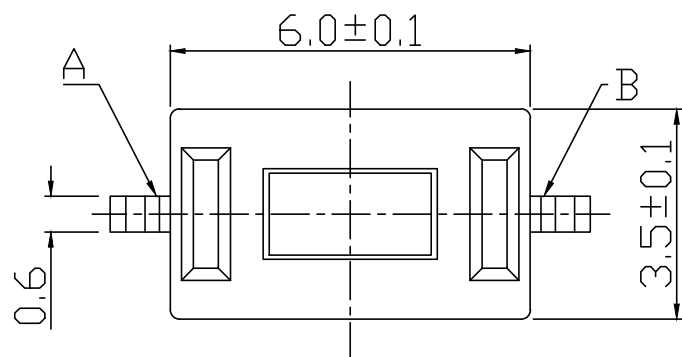

Recommended P.C.B Layout

1. 额定功率/Rating:DC 12V 50mA;
2. 接触阻抗/Contact Resistance:100mΩ Max;
3. 绝缘/Insulation Resistance:100MΩ Min;
4. 耐电压/Withstanding Voltage:AC250V For 1 Minute
5. 寿命/Life:80,000 cycles Min;
6. 动作力/Operating Force:160±40gf
7. 行程/Travel:0.20±0.1mm

NO.	DESCRIPTION	QTY	MATERIAL	FINISH
1	STEM	1	PPA	WHITE
2	COVER	1	SHEET IRON	PLATING Sn
3	CONTACT	1	SUS	PLATING Ag
4	BOTTOM	1	PPA	BLACK
5	TERMINAL	2	BRASS	PLATING Ag
UNIT:MM		SIZE: A4	SHEET: 1 OF 1	
		SCALE: 1/	VER: 1	
PART NO:		DESIGNER BY: DONY	TITLE: TACT SWITCH	
		APPROVED BY: JACK	MODEL NO: TS36C-S25V-E	
GENERAL TOLERANCE:		DATE:	 岡琦電子有限公司 GONGKIN ELECTRONIC CO.,LTD	
X.=±0.5, .X=±0.35				
.XX=±0.15, .XXX=±0.05				
.X*=±2°, .XX*=±1°				