

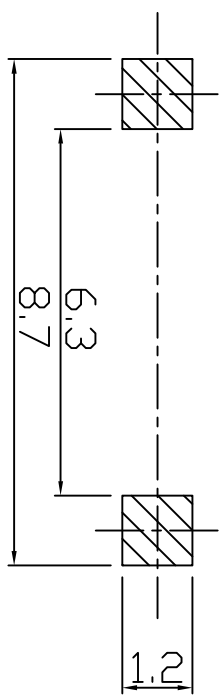
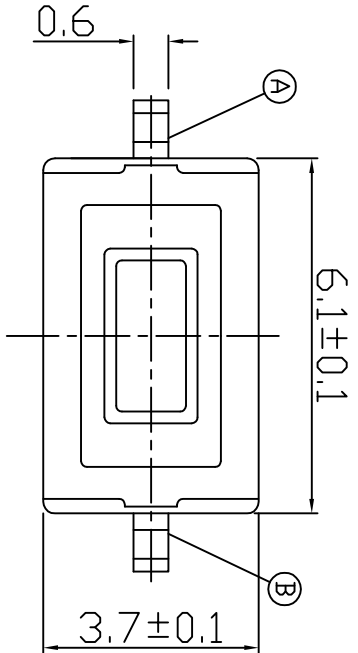



REV	DESCRIPTION	APPD	DATE

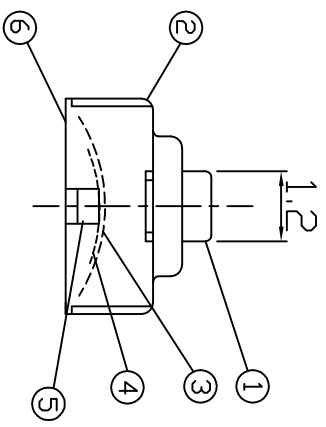

RECOMMENDED P.C.B LAYOUT

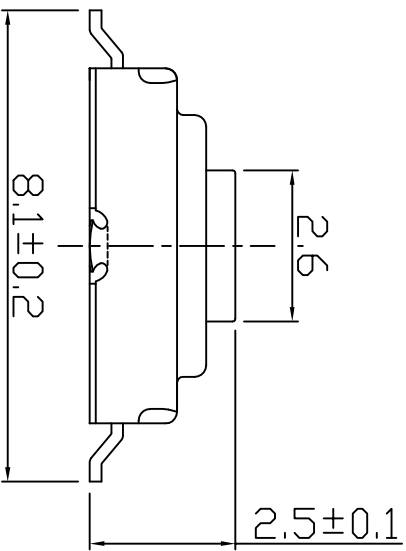

CIRCUIT DIAGRAM

- 1.额定功率/Ra ting:DC 12V 50mA;
- 2.接触阻抗/Contact Resistance:100mΩ Max;
- 3.绝缘/Insulation Resistance:100MΩ Min;
- 4.耐电压/Withstanding Voltage:AC250V For 1 Minute
- 5.寿命/Life:80,000 cycles Min;
- 6.动作力/Operating Force:250±50gf
- 7.行程/Travel:0.20±0.1mm

NO.	DESCRIPTION	QTY	MATERIAL	FINISH
1	STEM	1	PPA	RED
2	COVER	1	SUS	PLATING Sn
3	FILM	1	PI	ORANGE
4	CONTACT	1	SUS	PLATING Ag
5	TERMINAL	2	C2680	PLATING Ag
6	BOTTOM	1	PPA	BLACK
UNIT:MM	TITLE: TACT SWITCH			
	SIZE: A4	SHEET: 1 OF 1		
	SCALE: 1/	VER: 1		
PART NO:01S360115301		MODEL NO: TS36B2-S25-M(红钮)		
GENERAL TOLERANCE: X=±0.5, .X=±0.35, .XX=±0.15, .XXX=±0.05, X*=±2° .XX*=±1°		DESIGNER BY: DQNY	GONGKIN ELECTRONIC CO.,LTD	
DATE:		APPROVED BY: JACK	岡崎電子有限公司	