

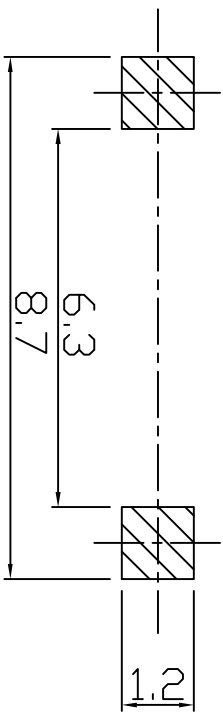
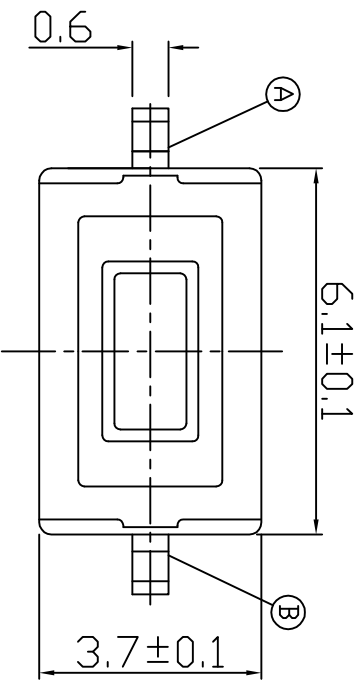



REV	DESCRIPTION	APPD	DATE
-----	-------------	------	------

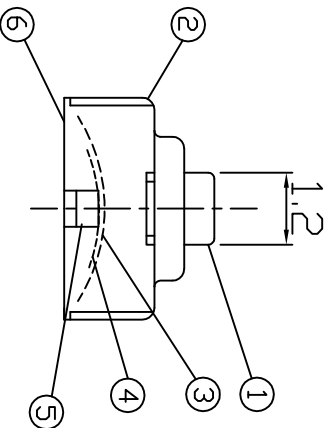

RECOMMENDED P.C.B LAYOUT

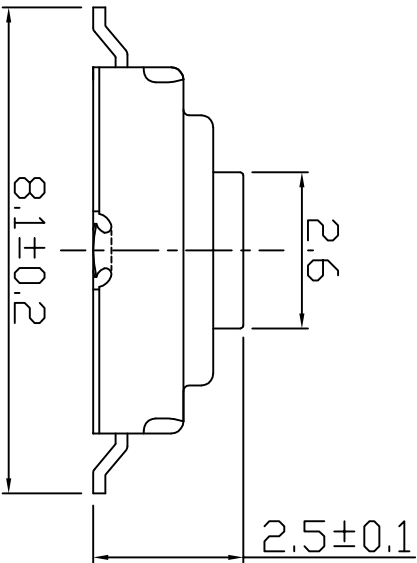

CIRCUIT DIAGRAM

NID.		DESCRIPTION	QTY	MATERIAL	FINISH
1		STEM	1	PPA	WHITE
2		COVER	1	SUS	PLATING Sn
3		FILM	1	PI	ORANGE
4		CONTACT	2	SUS	PLATING Ag
5		TERMINAL	2	C2680	PLATING Ag
6		BOTTOM	1	PPA	BLACK
UNIT:MM		SIZE: A4	SHEET: 1 OF 1		
	SCALE: 1/	VER: 1	TITLE: TACT SWITCH		
PART NO:01S360115301		MODEL NO:	TS36B2-S25-M		
GENERAL TOLERANCE: X.=±0.5, .X=±0.35 .XX=±0.15, .XXX=±0.05		DESIGNER BY:	DONLY		
X*=±2° .XX*=±1°		APPROVED BY:	JACK		
DATE:					
GONGKIN 岡崎電子有限公司 GONGKIN ELECTRONIC CO.,LTD					

- 1. 额定功率/Rating:DC 12V 50mA;
- 2. 接触阻抗/Contact Resistance:100mΩ Max;
- 3. 绝缘/Insulation Resistance:100MΩ Min;
- 4. 耐电压/Withstanding Voltage:AC250V For 1 Minute
- 5. 寿命/Life: 50,000 1/30, 000 cycles Min;
- 6. 动作力/Operating Force: 160±50gf 250±50gf
- 7. 行程/Travel:0.25±0.1mm