


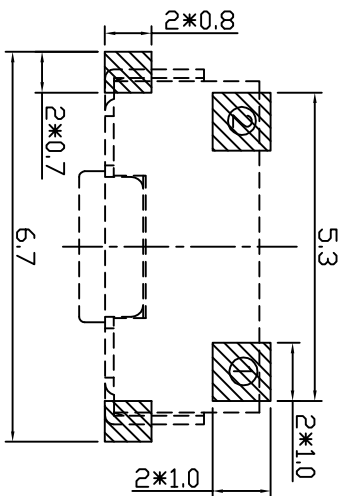

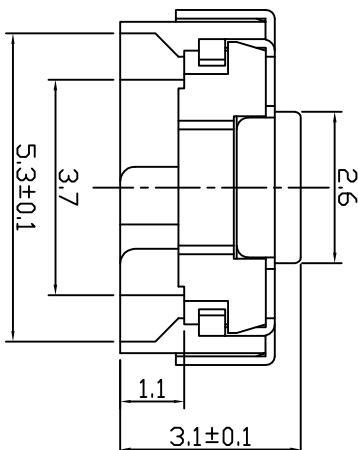

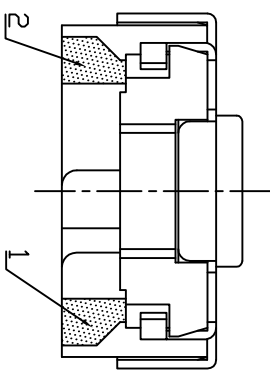


REV	DESCRIPTION	APPD	DATE

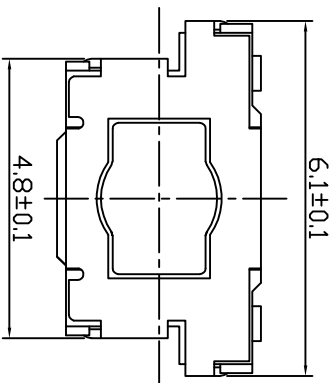

CIRCUIT DIAGRAM

P.C.B. LAYOUT

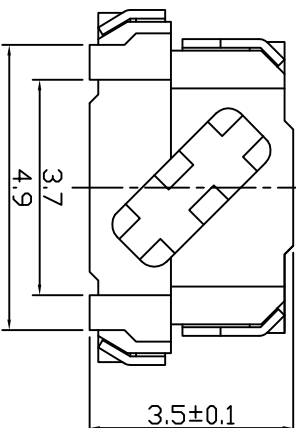

- 1.额定功率/Ra ting:DC 12V 50mA;
- 2.接触阻抗/Contact Resistance:100mΩMax;
- 3.绝缘/Insulation Resistance:100MΩMax;
- 4.耐电压/Withstanding Voltage:AC250V For 1 Minute;
- 5.寿命/Life:30,000 cycles Min;
- 6.动作力/Operating Force:250±50gf;
- 7.行程/Travel:0.2±0.1mm;
- 8.使用温度/Operating Temperature:-20℃~70℃.

NO.	DESCRIPTION	QTY	MATERIAL	FINISH
1	STEM	1	LCP	WHITE
2	COVER	1	CS191T0.15	PLATING Ag
3	CONTACT	1	SUS	PLATING Ag
4	MEMBRANCE	1	P10.05	YELLOW
5	BOTTOM	1	LCP	BLACK
6	TERMINAL	2	CS191T0.2	PLATING Ag
UNIT:mm		TITLE: TACT SWITCH		
		SIZE: A4	SHEET: 1 OF 1	MODEL NO: TS36E-SV-M
SCALE: /		VER: 1	DESIGNER BY: YONGX	
DATE:		APPROVED BY: JACK	GONGKIN ELECTRONIC CO.,LTD	
PART NO:		DWG NO:	TACT SWITCH	
GENERAL TOLERANCE: 1		DESIGNER BY: YONGX	GONGKIN ELECTRONIC CO.,LTD	
X=±0.25, X=±0.2		APPROVED BY: JACK	GONGKIN ELECTRONIC CO.,LTD	
XX=±0.1, XXX=±0.05		DATE:	GONGKIN ELECTRONIC CO.,LTD	
X*=±2°, XX*=±1°		DATE:	GONGKIN ELECTRONIC CO.,LTD	

1	2	3	4	5	6	7	8
A	B	C	D	E	F	G	H